


SRP-6MB-HV SERIES 6 INCH 60 CELLS

280-295w



KEY FEATURES

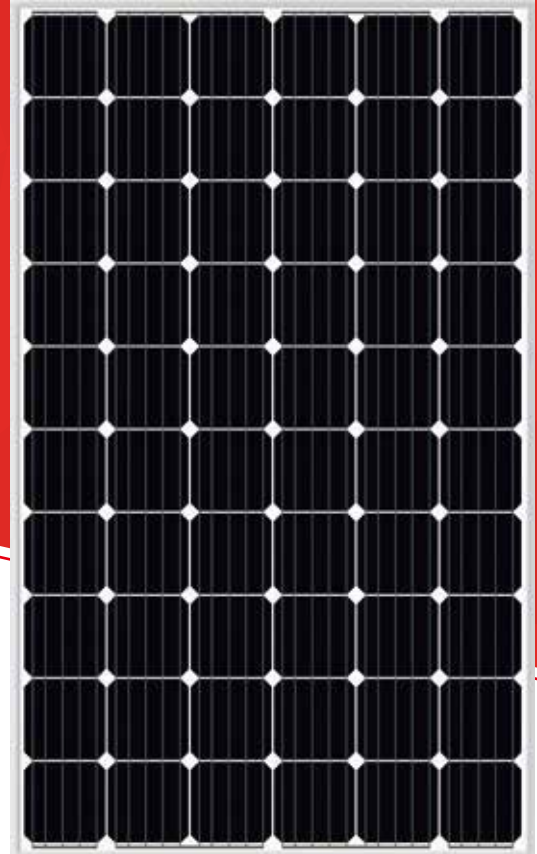

Bankable products



Class C fire safety class



Top rank in Photon yield measurement



Outstanding power output capability at low irradiance



Tested and certified according to newest IEC standard IEC61215:2016



Triple 100% Electroluminescence (EL) tests minimize breakage rate



Tested and certified according to newest IEC standard IEC61730-1:2016 IEC61730-2:2016



World 1st company to pass "Thresher Test" and "On-site Power Measurement Validation" certificate



Withstand and applicable up to 1500V high system voltage

MANAGEMENT SYSTEM

ISO 9001: Quality management system

ISO 14001: Standard for environmental management system

OHSAS 18001: International standard for occupational health and safety assessment system


INSURANCE



PRODUCT CERTIFICATES



WARRANTY

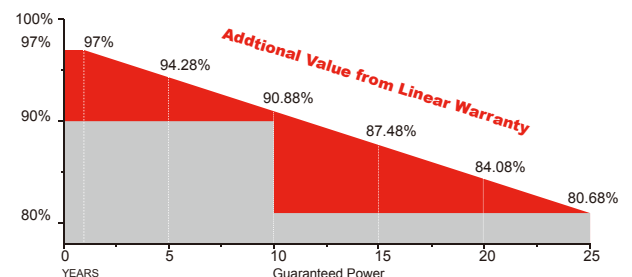

Guarantee on product material and workmanship



linear power output warranty

Specifications are subject to change without further notification SRP-DS-EN-2018V2.0 © Copyright 2018 Seraphim



SERAPHIM SOLAR SYSTEM CO., LTD.

www.seraphim-energy.com

info@seraphim-energy.com


Electrical Characteristics

Module Type	SRP-280-6MB-HV		SRP-285-6MB-HV		SRP-290-6MB-HV		SRP-295-6MB-HV	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power -P _{mp} (W)	280	208	285	212	290	215	295	219
Open Circuit Voltage -V _{oc} (V)	38.9	36.0	39.1	36.2	39.3	36.3	39.5	36.5
Short Circuit Current -I _{sc} (A)	9.22	7.45	9.33	7.54	9.44	7.63	9.56	7.73
Maximum Power Voltage -V _{mp} (V)	31.3	29.7	31.5	29.9	31.7	30.0	31.9	30.1
Maximum Power Current -I _{mp} (A)	8.95	7.01	9.05	7.09	9.15	7.17	9.25	7.28
Module Efficiency STC-η _m (%)	17.11		17.41		17.72		18.02	
Power Tolerance (W)	(0,+4.99)							
Maximum System Voltage (V)	1500 (TÜV)							
Maximum Series Fuse Rating (A)	20							
Pmax Temperature Coefficient	-0.40%/°C							
Voc Temperature Coefficient	-0.32 %/°C							
Isc Temperature Coefficient	+0.05 %/°C							
Operating Temperature	-40~+85 °C							
Nominal Operating Cell Temperature	45±2 °C							


STC: Irradiance 1000 W/m² module temperature 25°C AM=1.5

NOCT: Irradiance 800 W/m² ambient temperature 20°C wind speed :1m/s Power measurement tolerance: +/-3%

Curve

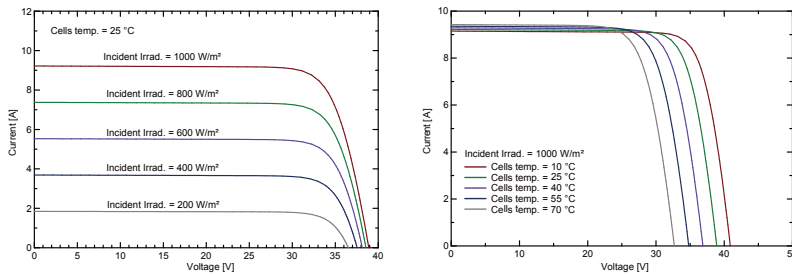

Technical drawing

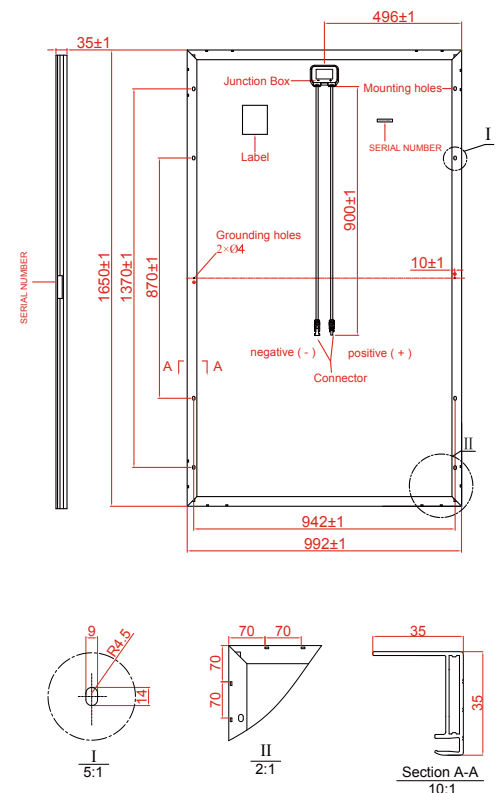

Mechanical Specifications

External Dimension	1650 x 992 x 35mm
Weight	18kg
Solar Cells	Mono crystalline 156.75 x 156.75 mm (60pcs)
Glass of Both Side	3.2 mm tempered glass, low iron
Frame	Anodized aluminium alloy
Junction Box	IP67
Output Cables	4.0 mm ² , cable length:900 mm
Connector	MC4 Compatible
Mechanical Load	5400 Pa

Packing Configuration

External Dimension	1650 x 992 x 35mm	
Container	20'GP	40'GP
Pieces per Pallet	30	30
Pallets per Container	12	28
Pieces per Container	360	840

* All Dimensions in mm

* The above drawing is a graphical representation of the product. For engineering quality drawings please contact SERAPHIM.