

SRP-(360-375)-6MA-HV



Electrical Characteristics(STC)

Module Type	SRP-360-6MA-HV	SRP-365-6MA-HV	SRP-370-6MA-HV	SRP-375-6MA-HV
Maximum Power at STC -P _{mp} (W)	360	365	370	375
Open Circuit Voltage -V _{oc} (V)	47.4	47.6	47.8	48.0
Short Circuit Current -I _{sc} (A)	9.70	9.78	9.88	9.96
Maximum Power Voltage -V _{mp} (V)	38.5	38.7	38.9	39.1
Maximum Power Current -I _{mp} (A)	9.36	9.44	9.52	9.60
Module Efficiency STC-η _m (%)	18.42	18.68	18.93	19.19
Optimizer Max. Output Voltage (V)	40.9			
Power Tolerance (W)	(0,+4.99)			
Maximum System Voltage (V)	1500			
Maximum Series Fuse Rating (A)	15			

Temperature Characteristics

Pmax Temperature Coefficient	-0.38 %/°C
Voc Temperature Coefficient	-0.28 %/°C(0%/°C at voltage limiting)
Isc Temperature Coefficient	+0.05 %/°C
Operating Temperature	-40~+85 °C
Nominal Operating Cell Temperature (NOCT)	45±2 °C



Packing Configuration

	1970 x 992 x 40 mm	
Container	20'GP	40'GP
Pieces per Pallet	27	27
Pallets per Container	10	22
Pieces per Container	270	594

Mechanical Specifications



External Dimensions	1970 x 992 x 40 mm
Weight	22.0 kg
Solar Cells	Mono crystalline 6 inch(72pcs)
Front Glass	3.2 mm AR coating tempered glass, low iron
Frame	Anodized aluminium alloy
Junction Box	IP67
Output Cables	4 mm ² ,cable length:1100 mm
Connector	MC4 Compatible

STC: Irradiance 1000 W/m², module temperature 25°C, AM=1.5
 NOCT: Irradiance 800 W/m², ambient temperature 20°C, wind speed :1m/s
 Specifications are subject to change without further notification.

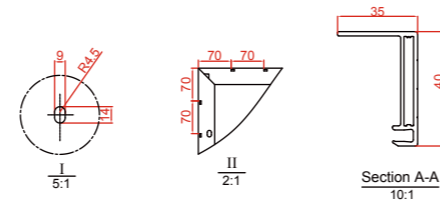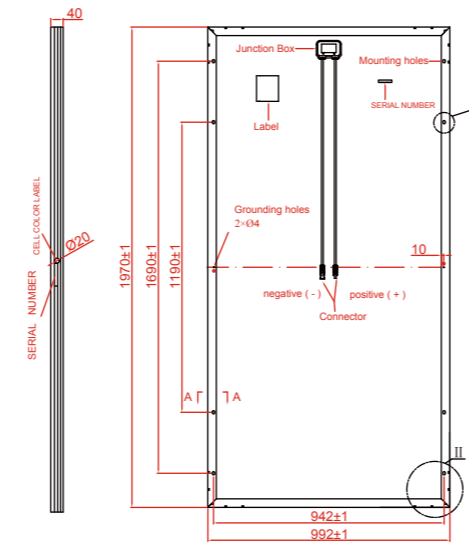

* All Dimensions in mm
 * The above drawing is a graphical representation of the product.

I-V CURVE (MPPT MODE)

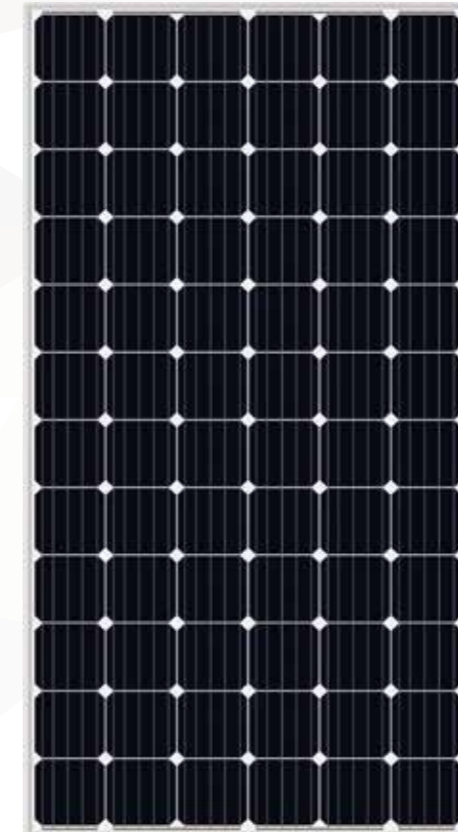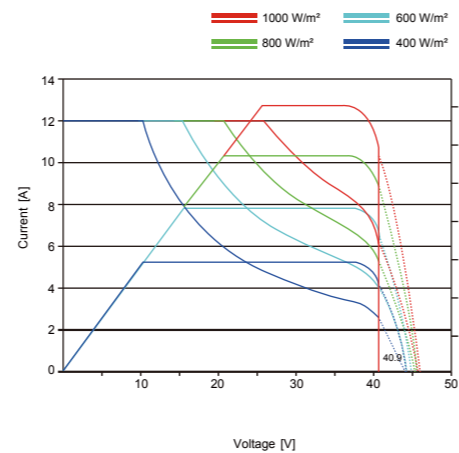

SERAPHIM MX 1500V
SRP-(360-375)-6MA-HV


SRP-(360-375)-6MA-HV



MANAGEMENT SYSTEM


- ISO 9001: Quality management system
- ISO 14001: Standard for environmental management system
- OHSAS 18001: International standard for occupational health and safety assessment system

WARRANTY

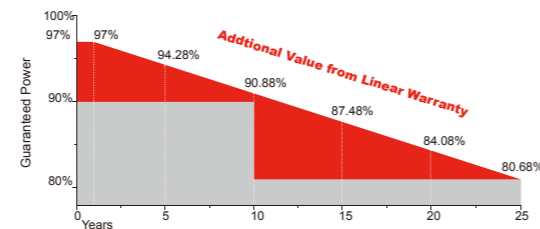

- 10 YEARS** Guarantee on product material and workmanship
- 25 YEARS** Linear power output warranty

Optimized by maxim integrated.



Provide flexibility to system design



Allows 20~35% more modules per string saving BoS cost



Higher power density



Enhanced energy harvest




Withstand and applicable up to 1500V high system voltage




Reduced shading effect Prevent Hot-spot


Comparing with conventional product, Seraphim integrated cell-string level optimizer into solar panel and redesigned the module. Trying best to provide advanced smart solution to customers, and improve performance & reliability of the solar panels.

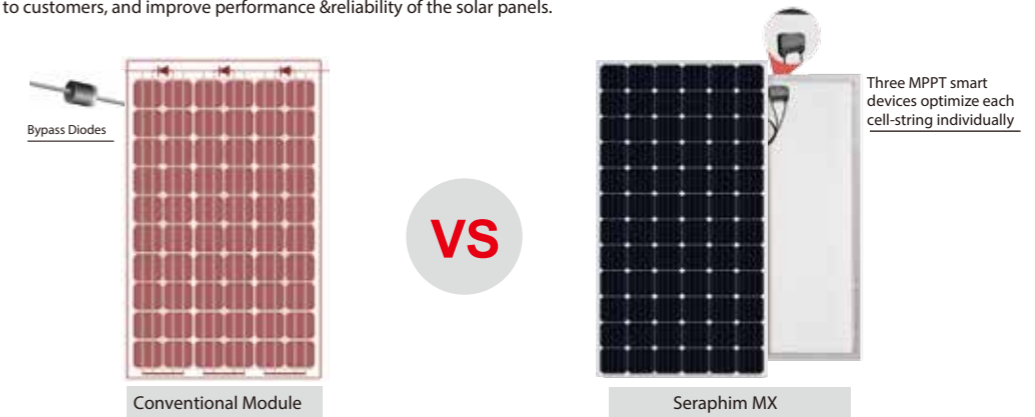

Under any condition, the Seraphim MX can optimize power output to enhance energy harvest. However, conventional modules or panel optimizer product will bypass cell-strings when they underperform. So Seraphim MX will give higher energy production, eliminate hot-spots issues.

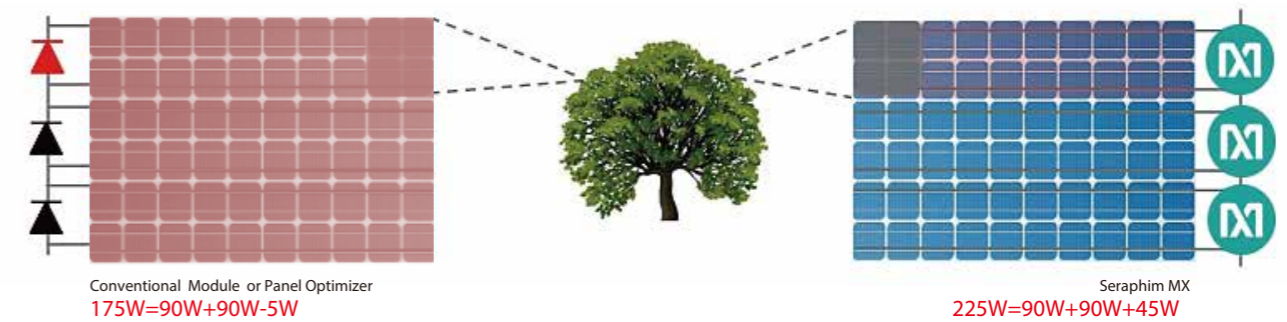

Seraphim MX reduces the shading effect significantly, prevents hot-spot formation, and eliminates diode failures. In the meantime, it will lower Operation and Maintenance costs.

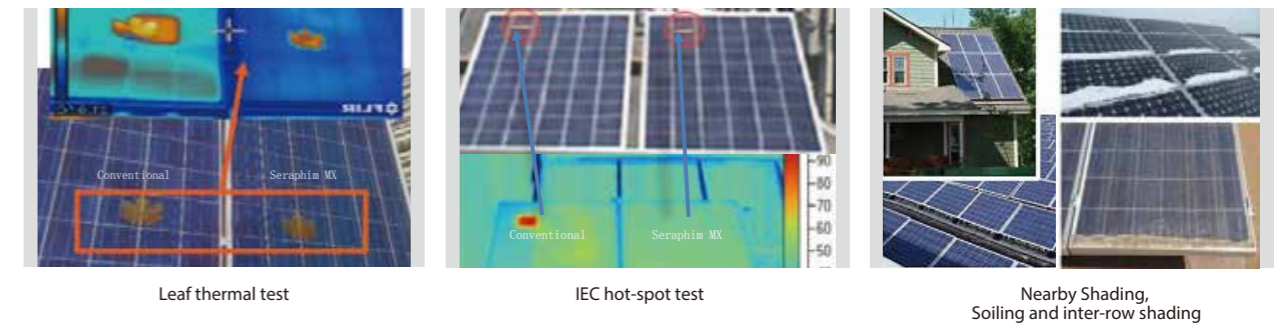

Seraphim MX enables flexible PV system design. Best performance with easiest installation.



Note: From simulations of PV System in San Jose, CA