

SIV SERIES

Small Changes, Big Accomplishments






525-540w



• SIV SERIES

Seraphim redefined the high-efficiency module series by integrating 182mm silicon wafers with multi-busbar and half-cut cell technologies. Seraphim panel combined creative technology effectively and extremely improved the module efficiency and power output.

• KEY FEATURES

-  Less mismatch to get more power
-  Less power loss by minimizing the shading impact
-  Competitive low light performance
-  3 times EL test to ensure best quality
-  Ideal choice for utility and commercial scale projects by reduced BOS and improve ROI

• QUALITY SYSTEM

ISO19001 / ISO14001 / OHSAS18001


• PRODUCT CERTIFICATION



• INSURANCE

PICC

• WARRANTY

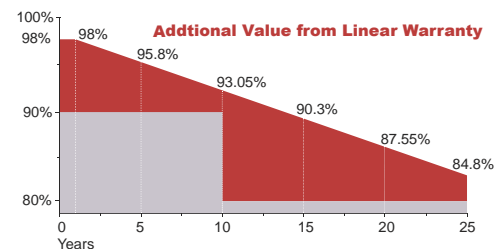

Guarantee on product material and workmanship



linear power output warranty



Electrical Characteristics

Module Type	SRP-525-BMA-HV	SRP-530-BMA-HV	SRP-535-BMA-HV	SRP-540-BMA-HV
	STC	STC	STC	STC
Maximum Power at STC (Pmp)	525	530	535	540
Open Circuit Voltage (Voc)	49.20	49.33	49.40	49.50
Short Circuit Current (Isc)	13.50	13.60	13.70	13.81
Maximum Power Voltage (Vmp)	40.78	41.03	41.29	41.55
Maximum Power Current (Imp)	12.88	12.92	12.96	13.00
Module Efficiency at STC(ηm)	20.54	20.74	20.93	21.13
Power Sorting (W)	(0 ~ +4.99)			
Maximum System Voltage	1500V DC			
Maximum Series Fuse Rating	25A			

STC: Irradiance 1000 W/m² module temperature 25°CAM=1.5
 Power measurement tolerance: +/-3%; Voltage measurement tolerance: +/-2%; Current measurement tolerance: +/-4%

Temperature Characteristics

Pmax Temperature Coefficient	-0.35 %/°C
Voc Temperature Coefficient	-0.27 %/°C
Isc Temperature Coefficient	+0.05 %/°C
Operating Temperature	-40 ~ +85 °C
Nominal Operating Cell Temperature (NOCT)	45±2 °C

Mechanical Specifications


External Dimensions	2256 x 1133 x 35 mm
Weight	28 kg
Solar Cells	PERC Mono (144pcs)
Front Glass	3.2 mm AR coating tempered glass, low iron
Frame	Anodized aluminium alloy
Junction Box	IP68, 3 diodes
Output Cables	4.0 mm ² , Portrait:350mm(+)/450mm(-); Landscape:1300mm
Mechanical Load	Front side 5400Pa/ Rear side 2400Pa
Connector	Genuine MC4 EVO2/ TT02 / 05-8
Fire Safety Class	Class C

Packing Configuration

	2256x 1133 x 35 mm	
Container	20'GP	40'HQ
Pieces per Pallet	31+4*	31
Pallets per Container	5	20
Pieces per Container	175	620

* 31+4 pieces per pallet is the special package which only suits for container transport

For details, please consult SERAPHIM

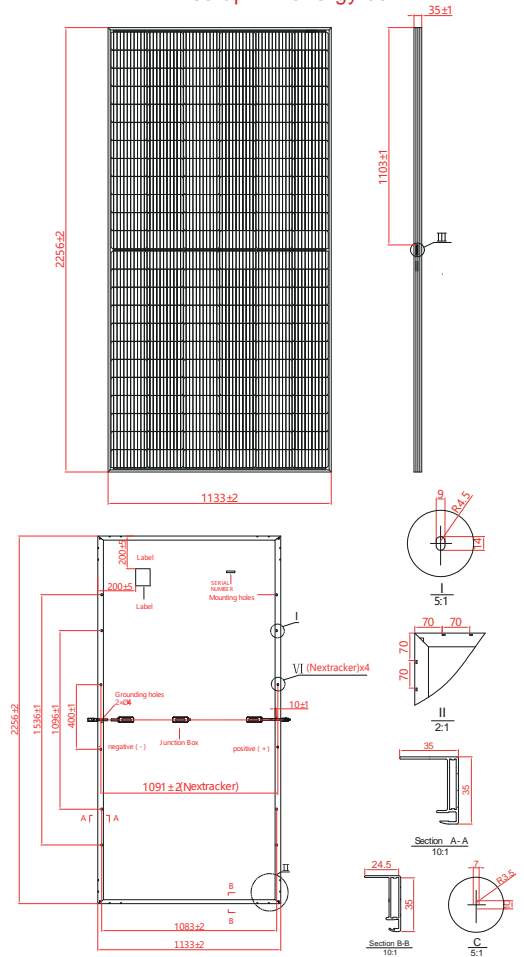

* All Dimensions in mm

I-V Curve

