

SII SERIES

Cuts Night, Breaks Dawn







425-440W



● SII SERIES

Seraphim redefined the high-efficiency module series by integrating 158.75mm silicon wafers with PERC and half-cut cell technologies. Seraphim panel combined creative technology effectively and extremely improved the module efficiency and power out.

● KEY FEATURES

-  Less mismatch to get more power
-  Less power loss by minimizing the shading impact
-  Competitive low light performance
-  3 times EL test to ensure best quality
-  Ideal choice for utility and commercial scale projects by reduced BoS and improved ROI
-  Outstanding reliability proven by PVEL for stringent environment condition:
 - Sand, acid, salt, and hail stones
 - 2400 Pa wind load and 5400 Pa snow load
 - Anti-PID

● QUALITY SYSTEM

ISO9001 / ISO14001 / ISO45001



● PRODUCT CERTIFICATION



● INSURANCE

PICC


● WARRANTY

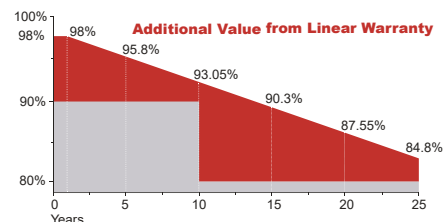

Electrical Characteristics


Module Type	SRP-425-BMZ-HV		SRP-430-BMZ-HV		SRP-435-BMZ-HV		SRP-440-BMZ-HV	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power at STC (Pmp)	425	322	430	325	435	329	440	332
Open Circuit Voltage (Voc)	53.0	49.4	53.2	49.6	53.4	49.8	53.5	49.9
Short Circuit Current (Isc)	10.17	8.22	10.24	8.28	10.33	8.35	10.40	8.41
Maximum Power Voltage (Vmp)	43.8	41.3	44.0	41.5	44.2	41.6	44.4	41.8
Maximum Power Current (Imp)	9.71	7.78	9.78	7.83	9.85	7.90	9.91	7.95
Module Efficiency at STC(η m)	19.46		19.69		19.91		20.14	
Power Tolerance	(0, +4.99)							
Maximum System Voltage	1500V DC							
Maximum Series Fuse Rating	20 A							

STC: Irradiance 1000 W/m² module temperature 25°C AM=1.5
Power measurement tolerance: +/-3%

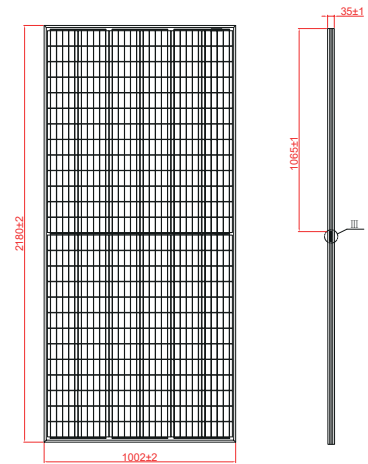

Temperature Characteristics



Pmax Temperature Coefficient	-0.34 %/°C
Voc Temperature Coefficient	-0.26 %/°C
Isc Temperature Coefficient	+0.05 %/°C
Operating Temperature	-40 ~ +85 °C
Nominal Operating Cell Temperature (NOCT)	45±2 °C

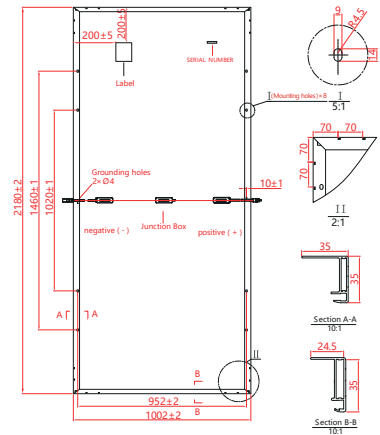

Mechanical Specifications

External Dimensions	2180 x 1002 x 35 mm
Weight	24.0 kg
Solar Cells	PERC Mono(156 pcs)
Front Glass	3.2 mm AR coating tempered glass, low iron
Frame	Anodized aluminium alloy
Junction Box	IP68, 3 diodes
Output Cable	4.0 mm ² , 250mm(+)/350mm(-) or Customized Length
Mechanical Load	Front side 5400Pa/ Back side 2400Pa

I-V Curve

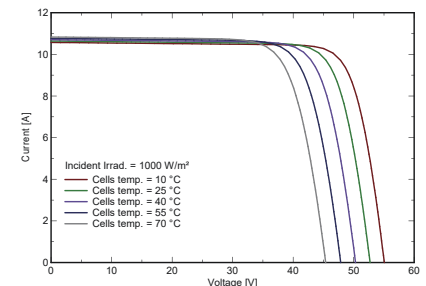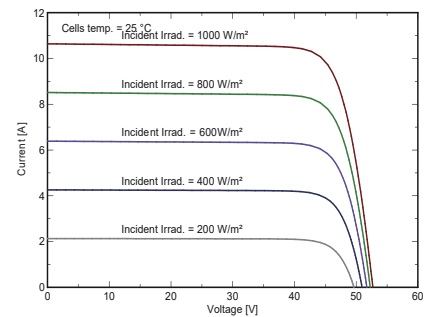

Packing Configuration

	2180 x 1002 x 35 mm	
Container	20'GP	40'HQ
Pieces per Pallet	31	31+2*
Pallets per Container	10	20
Pieces per Container	310	660

* 31+2 pieces per pallet is the special package which only suits for container transport.
For details, please consult SERAPHIM.

